




Industry: Retail

Project Name: CB2

Location: New York, New York

Materials: Havana Strand Bamboo Flooring

Installer:

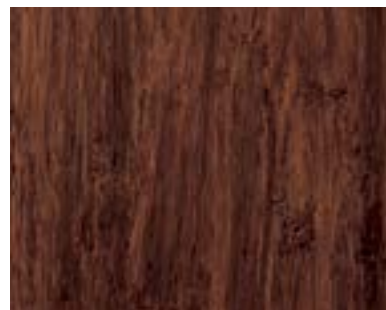

Havana Strand
Bamboo Flooring
FL-P3836PD-NAUF/FSC



Possible LEED Credits:

IEQc4.3: Low Emitting Materials

MRC7: Certified Wood

CA Section 01350: Passed

Other: No added urea formaldehyde

Neopolitan Strand Bamboo Flooring-NAUF/FSC

FL-P3836NEO-NAUF/FSC

Physical / Mechanical Properties - Strand Bamboo Flooring	
Dimensions:	3/8" x 3 3/4" x 36" 10mm x 96mm x 915mm
Installation:	Tongue and groove, glue down
ASTM E648: Critical Radiant Flux,	Class 1
ASTM D1037 Dimensional Stability:	<ul style="list-style-type: none"> • Linear Expansion: Parallel -0.02%, Perpendicular -0.23% • Thickness Swell: -0.25% Hardness (Janka Ball Test): 3,500 lbf (avg)
ASTM D2394: Coefficient of Friction	Static Coefficient / Dynamic (Sliding) Coefficient: 0.562 / 0.497
ASTM D3359: Adhesion by Tape Test	Class 4B
ASTM D4060: Taber Abrasion	22,500 cycles average
ASTM: 4442: Moisture Content	6-9% average
ASTM D5116-06: Organic Emissions [CA Section 01350]	Classroom scenario / Office scenario: Pass / Pass