



**Case Study: Hospitality**


**Hilton Resort**

**Industry:**  
Hospitality

**Location:**  
Los Cabos, Mexico

**Designer:**  
HBA

We have worked on various hospitality projects with HBA for more than 15 years. Their design work and attention to detail has made working with HBA one of our most enjoyable relationships. When they wanted to discuss the Hilton Los Cabos project we were intrigued. The project and the designs were multi-layered and for our part they were looking at our Linear and Reveal collections as well as some custom work. The project designers settled on the Linear #LL1, #LL3, #LL7 and Reveal #C11. The custom design work was used in the Club Lounge and is featured to the left and right wall surfaces of this space.




Linear Line Collection  
Style: LL1



Linear Line Collection  
Style: LL3



Linear Line Collection  
Style: LL7




Reveal Collection  
Style: C11



## Specifications

### Possible LEED Credits:

Low emitting materials and certified wood

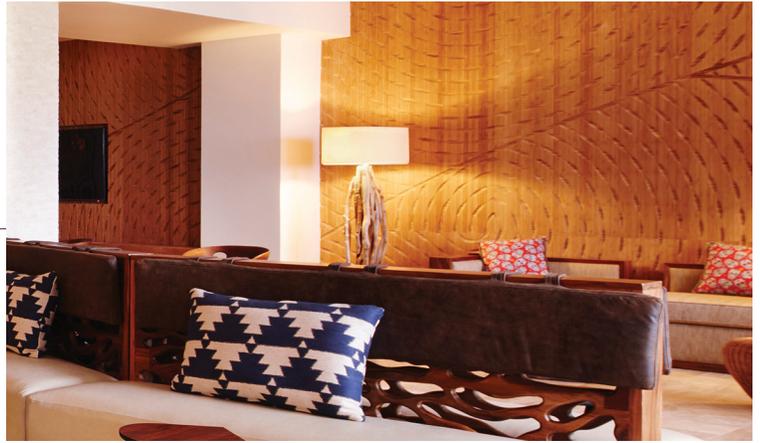

### Physical/ Mechanical Properties: Linear Line Collection

Dimensions:	3/4" x 47 3/4" x 95 3/4" - 19mm x 1213mm x 2432mm
Construction:	RealCore™ 3-ply
Installation:	Can be used in Walls, Ceilings & Millwork applications
ASTM E84: Surface Burning	Class C standard. Can be ordered as Class B and in some cases Class A
ASTM D6007-02: Formaldehyde Concentration in Air from Wood Products small chamber test	Plyboo = 0.004 ppm (surpasses CARB II standards, 0.05ppm & ULEF standards of 0.04ppm)
Finish:	Penofin Verde Natural Oil (Colors: Natural, Fog, Storm, Mist, Noir)
ASTM 4442: Moisture Content	6-9% average

### Physical/ Mechanical Properties: Reveal Collection

Dimensions:	3/4" x 47 3/4" x 95 3/4" - 19mm x 1213mm x 2432mm
Construction:	RealCore™ 3-ply
Installation:	Can be used in Walls, Ceilings & Millwork applications
ASTM E84: Surface Burning	Class C standard. Can be ordered as Class B and in some cases Class A
ASTM D6007-02: Formaldehyde Concentration in Air from Wood Products small chamber test	Plyboo = 0.004 ppm (surpasses CARB II standards, 0.05ppm & ULEF standards of 0.04ppm)
Finish:	Penofin Verde Natural Oil (Colors: Natural, Fog, Storm, Mist, Noir)
ASTM 4442: Moisture Content	6-9% average